# RoughDeck® HP Forklift SENDit Portability Frame, NTEP



As of: Thursday, February 13, 2025



## **Standard Features**

- Wireless connection from scale to operator display
- Excitation to the load cell(s) provided by the transmitter, not the indicator
- Each transmitter/receiver set is individually paired and will not interfere with another set
- Transmitter excitation voltage: +4.8 VDC,  $16 \times 350$  ohm or  $32 \times 700$  ohm load cells
- Estimated battery life of 100 hours
- Two setpoints with red/green display for operator verification
- Optional audible alarm


### **Approvals**





WARNING:
Cancer
and
Reproductive
Harm
California
Proposition
65

# RoughDeck HP SENDit Portability Frames Dimensions

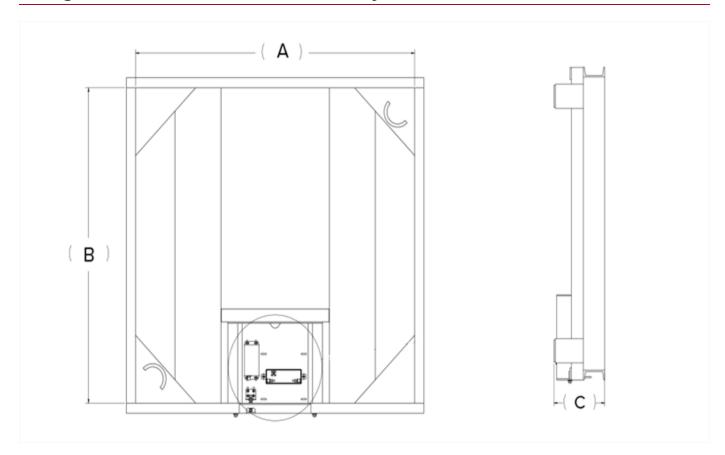

Drawing Dimensions		
Scale Size	4 x 4 ft	5 x 5 ft
A	48.75 in	60.75 in
В	48.75 in	60.75 in
С	9.50 in	9.50 in

#### **Parts**

#### Part # Description

#### **RoughDeck HP Portability Frame**

210900	Portability Frame for Roughdeck 4x4 mild steel 1K to 10K, Electronics not included, drawer for SENDit

210901 Portability Frame for Roughdeck 5x5 mild steel 1K to 10K, Electronics not included, drawer for SENDit

#### **SENDit Wireless Electronic Kit**

210899 8004HD Display AC, RdGrn Dual Color LED Instant Power-On 85-264VAC and Sendit Wireless Load Cell Interface Kit, NTEP, works with Portability Frame with drawer (NOTE: Display and Sendit are paired at factory)

# **Options**

#### Part # Description

**74574** Foot, Floor Scale SST Captured Ball 3.000Dia 1/2-20 UNF Thread, 3.500 Height

www.ricelake.com | 800-472-6703

An ISO 9001 Registered Company ©2024 Rice Lake Weighing Systems