RoughDeck® HP Caster SENDit Portability Frames, Non-NTEP




As of: Thursday, February 13, 2025



Standard Features

- Wireless connection from scale to operator display
- Works with any basic digital weight indicator
- Excitation to the load cell(s) provided by the transmitter, not the indicator
- Each transmitter/receiver set is individually paired and will not interfere with another set
- Transmitter excitation voltage: +4.8 VDC, 16×350 ohm or 32×700 ohm load cells

RoughDeck HP SENDit Portability Frames Dimensions

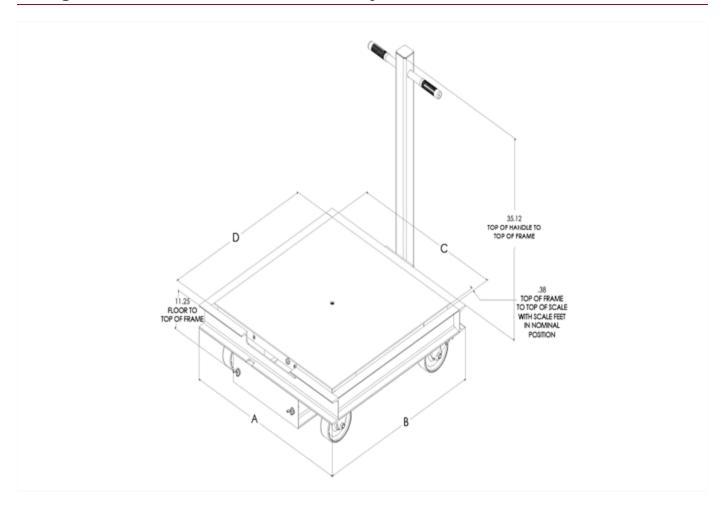

Drawing Dimensions				
Scale Size	2.5 × 2.5 ft	3 × 3 ft	4 × 4 ft	
Α	33.92 in	39.92 in	51.92 in	
В	33.92 in	39.92 in	51.92 in	
С	30.75 in	36.75 in	48.75 in	
D	30.75 in	36.75 in	48.75 in	

Parts

Part

Description

RoughDeck HP Portability Frame

210902	Caster Portability Frame Roughdeck 2.5×2.5 mild steel 1K to 5K, Electronics not included Two rigid forged steel caster on the front, Two swivel forged steel casters with lock on the back, with drawer for SENDit
210903	Caster Portability Frame Roughdeck 3 x 3 mild steel 1K to 5K, Electronics not included Two rigid forged steel caster on the front, Two swivel forged steel casters with lock on the back, with drawer for SENDit
210904	Caster Portability Frame Roughdeck 4 x 4 mild steel 1K to 5K, Electronics not included Two rigid forged steel caster on the front, Two swivel forged steel casters with lock on the back, with drawer for SENDit
210905	Caster Portability Frame Roughdeck 4 x 4 mild steel 10K, Electronics not included Two rigid forged steel caster on the front, Two swivel forged steel casters with lock on the back, with drawer for SENDit

SENDit Wireless Electronics Kit

210898 Sendit Wireless Load Cell Interface Kit, non-ntep, customer to supply indicator, works with Portability Frame with drawer

www.ricelake.com | 800-472-6703

An ISO 9001 Registered Company ©2024 Rice Lake Weighing Systems